

Secondary Publication



Kim, Evgeny; Klinger, Roman

An Analysis of Emotion Communication Channels in Fan-Fiction : Towards Emotional Storytelling

Date of secondary publication: 16.05.2025

Version of Record (Published Version), Conferenceobject

Persistent identifier: urn:nbn:de:bvb:473-irb-1083073

Primary publication

Kim, Evgeny; Klinger, Roman (2019): An Analysis of Emotion Communication Channels in Fan-Fiction : Towards Emotional Storytelling, in: Francis Ferraro, Ting-Hao 'Kenneth' Huang, Stephanie M. Lukin, u. a. (Ed.), Proceedings of the Second Workshop on Storytelling, Association for Computational Linguistics, pp. 56–64, doi: 10.18653/v1/W19-3406.

Legal Notice

This work is protected by copyright and/or the indication of a licence. You are free to use this work in any way permitted by the copyright and/or the licence that applies to your usage. For other uses, you must obtain permission from the rights-holders.

This document is made available under a Creative Commons license.



The license information is available online:

<https://creativecommons.org/licenses/by/4.0/legalcode>

An Analysis of Emotion Communication Channels in Fan Fiction: Towards Emotional Storytelling

Evgeny Kim and Roman Klinger

Institut für Maschinelle Sprachverarbeitung

University of Stuttgart

Pfaffenwaldring 5b, 70569 Stuttgart, Germany

{evgeny.kim, roman.klinger}@ims.uni-stuttgart.de

Abstract

Centrality of emotion for the stories told by humans is underpinned by numerous studies in literature and psychology. The research in automatic storytelling has recently turned towards emotional storytelling, in which characters' emotions play an important role in the plot development (Theune et al., 2004; y Pérez, 2007; Méndez et al., 2016). However, these studies mainly use emotion to generate propositional statements in the form “A feels affection towards B” or “A confronts B”. At the same time, emotional behavior does not boil down to such propositional descriptions, as humans display complex and highly variable patterns in communicating their emotions, both verbally and non-verbally. In this paper, we analyze how emotions are expressed non-verbally in a corpus of fan fiction short stories. Our analysis shows that stories written by humans convey character emotions along various non-verbal channels. We find that some non-verbal channels, such as facial expressions and voice characteristics of the characters, are more strongly associated with *joy*, while gestures and body postures are more likely to occur with *trust*. Based on our analysis, we argue that automatic storytelling systems should take variability of emotion into account when generating descriptions of characters' emotions.

1 Introduction and Motivation

As humans, we make sense of our experiences through stories (McKee, 2003). A key component of any captivating story is a character (Kress, 2005) and a key component of every character is emotion, as “without emotion a character's personal journey is pointless” (Ackerman and Puglisi, 2012, p. 1). Numerous works pinpoint the central role of emotions in storytelling (Hogan, 2015; Johnson-Laird and Oatley, 2016; Ingerman and Economy, 2009), as well as story com-

prehension and evaluation (Komeda et al., 2005; Van Horn, 1997; Mori et al., 2019).

Emotion analysis and automatic recognition in text is mostly channel-agnostic, *i.e.*, does not consider along which non-verbal communication channels (face, voice, etc.) emotions are expressed. However, we know that the same emotions can be expressed non-verbally in a variety of ways (Barrett, 2017, p. 11), for example, through internal feelings of the character, as shown in Figure 1. We argue that automatic storytelling systems should take this information into account, as versatility of the emotion description is a prerequisite for engaging and believable storytelling (Ackerman and Puglisi, 2012, p. 3).

There is a growing body of literature in the field of natural language generation that uses emotions as a key component for automatic plot construction (Theune et al., 2004; y Pérez, 2007; Méndez et al., 2016) and characterization of virtual agents (Imbert and de Antonio, 2005; Dias and Paiva, 2011). However, these and other studies put an emphasis on emotion *per se* (“A feels affection towards B”), or on the social behavior of characters (“A confronts B”) making little or no reference to how characters express emotions, both verbally and non-verbally.

In this paper, we aim at closing this gap by analyzing how characters express their emotions using non-verbal communication signals. Specifi-

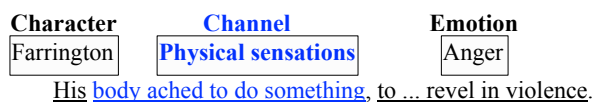


Figure 1: Example of the emotion expressed using non-verbal communication channel. The annotation of *character* and *emotion* are available in the dataset by Kim and Klinger (2019). *Channel* annotation (in blue) is an extension to the original dataset.

cally, we analyze how eight emotions (*joy, sadness, anger, fear, trust, disgust, surprise, and anticipation*) defined by Plutchik (2001) are expressed along the following channels introduced by van Meel (1995): 1) physical appearance, 2) facial expressions, 3) gaze, looking behavior, 4) arm and hand gesture, 5) movements of body as a whole, 6) characteristics of voice, 7) spatial relations, and 8) physical make-up.

This paper is an extension to our previous study (Kim and Klinger, 2019), in which we presented a corpus of emotion relations between characters in fan fiction short stories. We post-annotate the corpus with non-verbal expressions of emotions and analyze two scenarios of non-verbal emotion expression: when the feeler of an emotion is alone, and when a communication partner, who also plays a role in the development of emotion, is present. In our analysis, we look into the emotions associated with each non-verbal behavior, mapping emotions to non-verbal expressions they frequently occur with.

Our contributions are therefore the following: 1) we propose that natural language generation systems describing emotions should take into account how emotions are expressed non-verbally, 2) we extend the annotations presented in Kim and Klinger (2019) and quantitatively analyze the data, 3) we show that facial expressions, voice, eyes and body movements are the top three channels among which the emotion is expressed, 4) based on the data, we show that some emotions are more likely to be expressed via a certain channel, and this channel is also influenced by the presence or non-presence of a communication partner.

Our corpus is available at <https://www.ims.uni-stuttgart.de/data/emotion>.

2 Related Work

Emotion analysis has received great attention in natural language processing (Mohammad and Bravo-Marquez, 2017; Mohammad et al., 2018; Klinger et al., 2018; Felbo et al., 2017; Abdul-Mageed and Ungar, 2017; Zhou and Wang, 2018; Gui et al., 2017, *i.a.*). Most existing studies on the topic cast the problem of emotion analysis as a classification task, by classifying documents (*e.g.*, social media posts) into a set of predefined emotion classes. Emotion classes used for the classification are usually based on discrete categories of Ekman (1970) or Plutchik (2001) (*cf.*

Alm et al. (2005), Suttles and Ide (2013), Mohammad (2012)). Fewer studies address emotion recognition using a dimensional emotion representation (*cf.* Buechel and Hahn (2017); Preoțiuc-Pietro et al. (2016)). Such representation is based on the valence-arousal emotion model (Russell, 1980), which can be helpful to account for subjective emotional states that do not fit into discrete categories.

Early attempts to computationally model emotions in literary texts date back to the 1980s and are presented in the works by Anderson and McMaster (1982, 1986), who build a computational model of affect in text tracking how emotions develop in a literary narrative.

More recent studies in the field of digital humanities approach emotion analysis from various angles and for a wide range of goals. Some studies use emotions as feature input for genre classification (Samothrakis and Fasli, 2015; Henny-Krahmer, 2018; Yu, 2008; Kim et al., 2017), story clustering (Reagan et al., 2016), mapping emotions to geographical locations in literature (Heuser et al., 2016), and construction of social networks of characters (Nalisnick and Baird, 2013; Jhavar and Mirza, 2018). Other studies use emotion analysis as a starting point for stylometry (Koolen, 2018), inferring psychological characters' traits (Egloff et al., 2018), and analysis of the causes of emotions in literature (Kim and Klinger, 2018, 2019).

To the best of our knowledge, there is no previous research that addresses the question of how emotions are expressed non-verbally. The only work that we are aware of is a literary study by van Meel (1995), who proposes several non-verbal communication channels for emotions and performs a manual analysis on a set of several books. He finds that voice is the most frequently used category, followed by facial expressions, arm and hand gestures and bodily postures. Van Meel explains the dominance of voice by the predominant role that speech plays in novels. However, van Meel does not link the non-verbal channels to any specific emotions. In this paper, we extend his analysis by mapping the non-verbal channels to a set of specific emotions felt by the characters.

3 Corpus Creation

We post-annotate our dataset of emotion relations between characters in fan fiction (Kim and

Emotion	Face	Body	Appear.	Look.	Voice	Gesture	Sptrel.	Sensations	No channel	Total
anger	23	20	5	38	51	7	0	4	163	311
anticipation	4	14	0	17	4	2	7	6	267	321
disgust	3	6	1	3	0	0	0	1	149	163
fear	4	28	13	16	8	1	0	25	124	219
joy	76	26	7	12	52	19	5	33	268	498
sadness	3	5	4	4	2	0	3	7	81	109
surprise	10	5	3	13	1	0	0	2	118	152
trust	4	15	1	4	1	21	3	0	144	193
Total	127	119	34	107	119	50	18	78	1314	1966

Table 1: Counts of emotion and expression-channel pairs. *No channel* means that instance contains no reference to how emotion is expressed non-verbally.

Klinger, 2019) with non-verbal communication channels of emotion expressions. The dataset includes complete annotations of 19 fan fiction short stories and of one short story by James Joyce. The emotion relation is characterized by a triple (C_{exp}, e, C_{cause}) , in which the character C_{exp} feels the emotion e . The character C_{cause} (to which we refer as a “communication partner”) is part of an event which triggers the emotion e . The emotion categorization presented in the dataset follows Plutchik’s (2001) classification, namely *joy*, *sadness*, *anger*, *fear*, *trust*, *disgust*, *surprise*, and *anticipation*.

Given an annotation of a character with an emotion, we annotate non-verbal channels of emotion expressions following the classification proposed by van Meel (1995), who defines the following eight categories: 1) physical appearance, 2) facial expressions, 3) gaze, looking behavior, 4) arm and hand gesture, 5) movements of body as a whole, 6) characteristics of voice, 7) spatial relations (references to personal space), and 8) physical make-up. To clarify the category of *physical make-up*, we redefine it under the name of *physical sensations*, *i.e.*, references to one’s internal physiological signals perceived by the feeler of the emotion.

The task is exemplified in Figure 1. Labels for emotion (*Anger*) and character (*Farrington*) are given. *Physical sensation* is an example of a channel annotation we use to extend the original dataset.

The annotations were done by three graduate students in our computational linguistics depart-

	a1–a2	a1–a3	a2–a3
Span	31	29	45
Sentence	49	45	59

Table 2: F_1 scores in % for agreement between annotators on a span level. a1, a2, and a3 are different annotators. Span: label of channel and offsets are considered. Sentence: only label of the channel in the sentence is considered.

ment within a one-month period. The annotators were asked to read each datapoint in the dataset and decide if the emotion expressed by the feeler (*character*) has an associated non-verbal channel of expression. If so, the annotators were instructed to mark the corresponding textual span and select a channel label from the list of non-verbal communication channels given above.

The results of inter-annotator agreement (IAA) are presented in Table 2. We measure agreement along two dimensions: 1) span, where we measure how well two people agree on the label of a non-verbal emotion expression, as well as on the exact textual position of this expression, and 2) sentence, where we measure how well two people agree on the label of non-verbal emotion expression in a given sentence (*i.e.*, the exact positions of the channel are not taken into account). The agreement is measured using the F_1 measure, where we assume that annotations by one person are true, and annotations by another person are predicted. As one can see, the agreement scores for spans (*i.e.*, channel label and exact textual po-

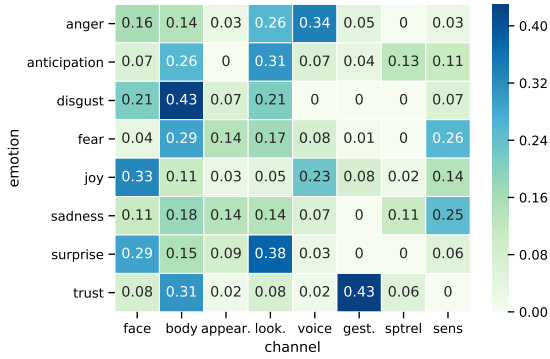


Figure 2: Distribution of non-verbal channels with all emotions. Darker color indicates higher value. Values in the cells are percentage ratios. Each cell is normalized by the row sum of absolute frequencies.

sitions) are relatively low (lowest 29%, highest 45% F_1 respectively). The IAA scores on a sentence level are higher (lowest agreement is 45%, highest 59% F_1 respectively), as we only consider the label of the non-verbal channel in a sentence without looking into the exact textual positions of the annotations.

4 Analysis

Table 1 summarizes the results of the annotation of non-verbal channels of emotion expressions, Table 3 gives examples of these expressions in the dataset.

In total, there are 652 annotations of non-verbal emotion expressions. By absolute counts, facial expressions (*Face*, 127 occurrences), body movements (*Body*, 119), voice (*Voice*, 199), and looking behavior (*Look.*, 107) have the highest number of annotations. Spatial relations (*Sptrel.*, 78) and physical appearance (*Appear.*, 34) have the lowest number of annotations.

4.1 Emotion-Channel associations

We start our analysis by looking into the emotion-channel associations. Namely, we analyze which non-verbal channels are associated with which emotions. To that end, we plot a heatmap of the emotion–non-verbal-channel matrix. The value of each cell in the heatmap is normalized by the row sum (*i.e.*, total counts of channel annotations) and represents the likelihood of emotion-channel association in the dataset, for each emotion, respectively.

As Figure 2 shows, *anger* is more likely to be expressed with *voice*, while *joy* is more likely to

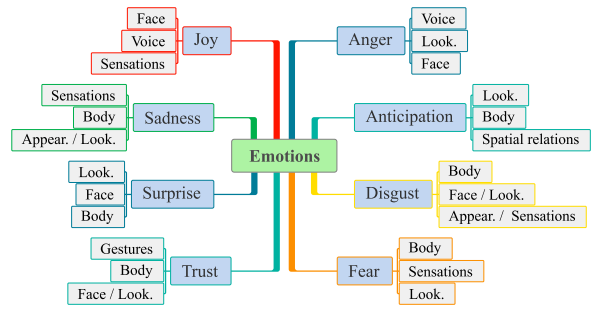


Figure 3: Emotion-channel map. Each branch is an emotion, whose branches are the top three non-verbal channels associated with the emotion.

be expressed with *face*. In contrast to all other emotions, *sadness* is more likely to be experienced internally (*sens.* column in Figure 2) by the feeler, as opposed to being communicated non-verbally. Some channels and emotions show no association, such as *gestures* (*gest.*) and *disgust* or *spatial relations* (*sptrel.*) and *anger*. Given the relatively small size of the dataset, we do not argue that these associations are not possible in principle. For example, *fear* and *spatial relations* have zero association in our analysis, however, it is likely that somebody expresses this emotion by moving away subconsciously (increasing personal space) from the source of danger. At the same time, *fear* is most strongly associated with *body movements* as a whole, which can be difficult to distinguish from spatial relations. However, we believe that these associations still reflect the general trend: emotions that require immediate actions and serve evolutionary survival function, such as anger, disgust, and fear, are more likely to be expressed with actions. For example, anger is an unpleasant emotion that often occurs as a response to an appraisal of a blocked goal (Harmon Jones and Harmon-Jones, 2016), which can be resolved by using voice characteristics (commanding or shouting at someone who prevents you from achieving your goal).

Overall, we observe that *face*, *look.*, *voice*, and *body* channels are predominantly used with all emotions. We visualize the strongest associations of emotions and non-verbal channels in Figure 3. For each emotion, the figure shows the top three (in a descending order) strongly associated non-verbal channels. As one can see, the branches are dominated by *face*, *look.*, *voice*, and *body* channels. The only exception is *trust*, for which the predominant way to express emotions non-

Channel	Emotion	Examples
Facial expressions	anger fear	rolled his eyes smiled nervously
Body movements	anger trust	stormed back out slumped his shoulders
Physical appearance	fear	blushed crimson red
Looking behavior	fear anticipation	averted her eyes pause to look back
Voice	joy fear	purred voice getting smaller and smaller
Arm and hand gestures	trust	opened her arms
Spatial relations	joy trust	leaping into her arms pulled him closer to his chest
Physical sensations	joy fear	tingling all over hear in his throat

Table 3: Textual examples of non-verbal emotion expressions.

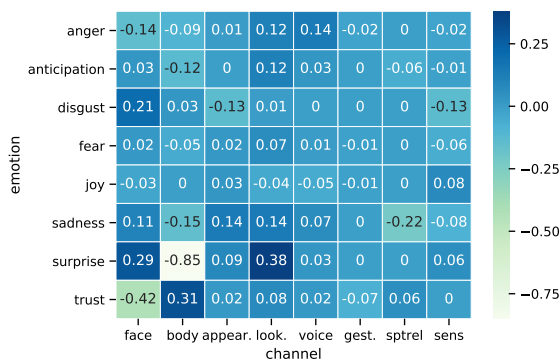


Figure 4: The difference between situations, in which a character feels an emotion and the communication partner is present, and situations in which the communication partner is not present (normalized by row sum). Darker color/higher values indicates that the channel is more likely to be used when there is a communication partner.

verbally is through *gestures*, and *sadness*, which is predominantly felt “internally” (*sensations*).

4.2 Presence of a communication partner

The original dataset contains information whether an emotion of the character is evoked by another character (communication partner). We use this information to understand how the presence of a communication partner affects the choice of a non-verbal channel.

To that end, we plot a heatmap (Figure 4) from

the delta values between situations, in which the communication partner is present, and situations in which the communication partner is not present. As it can be seen from Figure 4, *trust* is more strongly associated with *body movements* when a communication partner is present. *Sadness*, which is more likely to associate with inner physical sensations in the feeler, is expressed through the *physical appearance* and *looking behavior* when the communication partner is present. Likewise, *disgust* is more likely to be expressed with *facial expressions*, and *anticipation* is more likely to be expressed with *looking behavior*.

Again, we observe that *body*, *voice*, *face*, and *look*. channels are the predominant non-verbal communication channels for emotion expressions.

4.3 Timeline analysis

To understand if there are patterns in the frequency of use of non-verbal channels in a narrative, we perform an additional analysis.

For this analysis, we split each short story in the dataset in ten equally sized chunks and get frequencies of each non-verbal channel, which are then plotted as time-series with confidence intervals (Figure 5). The averaged values for each channel are plotted as a dark line with circular markers. The lighter area around the main line represents confidence intervals of 95%, which are calculated using bootstrap resampling.

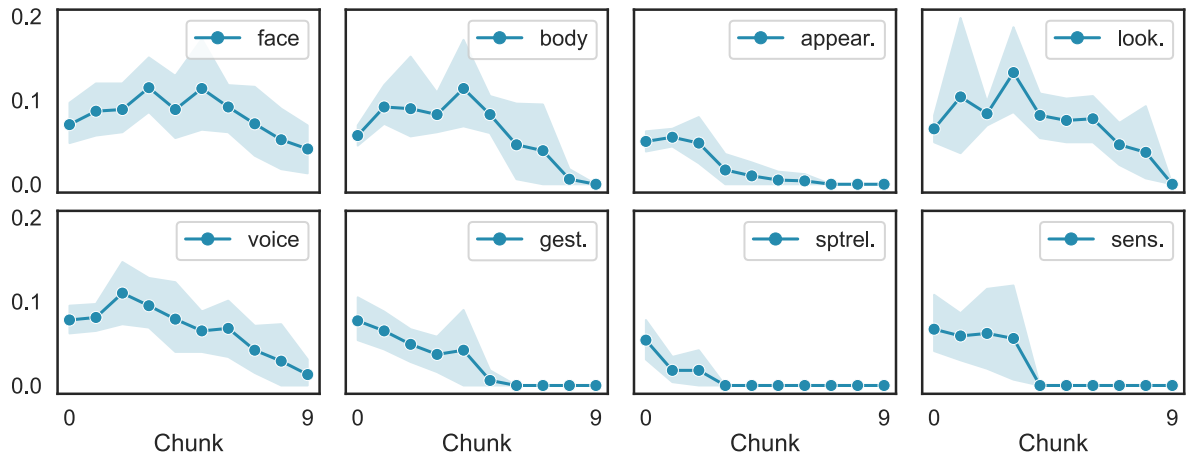


Figure 5: Distribution of non-verbal emotion expressions in the narrative. Markers on the plot lines indicate the text chunk. The plots are given for ten chunks. Light area around the solid line indicates confidence interval of 95%. y-axis shows percentage.

We observe the general tendency of all non-verbal channels to vanish towards the end of the story. The only exception is *Facial expressions*, which after peaking in the middle of a story reverts to the mean. Overall, we find no consistent pattern in the use of non-verbal channels from beginning to an end of a story.

5 Discussion and Conclusion

The results of the analysis presented in Section 4 show that emotions are expressed in a variety of ways through different non-verbal channels. However, the preferred communication channel depends on whether a communication partner is present or not. Some channels are used predominantly only when the feeler communicates her emotion to another character, other channels can be used in any situation.

Sadness stands out from other emotions in a sense that it is predominantly not expressed using any external channels of non-verbal communication. In other words, it is more common for the characters in the annotated dataset to go through sadness “alone” and feel it “in the body”, rather than show it to the outer world. However, when another character (communication partner) is the reason of sadness experienced by the feeler, he or she will most likely use eyes and overall behavior to show this emotion.

In this paper, we showed that in human-written stories, emotions are not only expressed as propositions in the form of “A feels affection towards B” or “A confronts B”. As Table 3 shows, of-

ten there is no direct mention of the feelings A holds towards B (“rolled his eyes”, “purred”). It is, therefore, important, that this observation finds its place in automatic storytelling systems. Some attempts have been done in natural language generation towards controllable story generation (Peng et al., 2018; Tambwekar et al., 2018). We propose that emotion expression should be one of the controllable parameters in automatic storytellers. As more and more language generation systems have started using emotion as one of the central components for plot development and characterization of characters, there will be a need for a more versatile and subtle description of emotions, which is realized not only through propositional statements. In the end, no single instance of same emotion is expressed in the same way (Barrett, 2017), and emotion-aware storytelling systems should take this information into account when generating emotional profiles of characters.

6 Future Work

This paper proposes one approach to non-verbal emotion description that relies on a rigid ontology of emotion classes. However, it might be reasonable to make use of unsupervised clustering of non-verbal descriptions to overcome the limitations of using a relatively small number of coarse emotion categories for the description of character emotions. Once clustered, such descriptions could be incorporated in the generated text (e.g., a plot summary) and would elaborate all the simplistic descriptions of character emotions.

Other research directions seems feasible too. For example, the annotations, which we presented in this paper, can be used for building and training a model that automatically recognizes non-verbal channels of emotion expressions. This might, in a multi-task learning setting, improve emotion classification. The data we provide could also be used as a starting point for terminology construction, namely bootstrapping a lexicon of emotion communications with different channels. Finally, our work can serve as a foundation for the development of an automatic storytelling system that takes advantage of such resources.

Acknowledgements

This research has been conducted within the CRETA project (<http://www.creta.uni-stuttgart.de/>) which is funded by the German Ministry for Education and Research (BMBF) and partially funded by the German Research Council (DFG), projects SEAT (Structured Multi-Domain Emotion Analysis from Text, KL 2869/1-1).

References

- Muhammad Abdul-Mageed and Lyle Ungar. 2017. *EmoNet: Fine-grained emotion detection with gated recurrent neural networks*. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 718–728, Vancouver, Canada. Association for Computational Linguistics.
- Angela Ackerman and Becca Puglisi. 2012. *The Emotion Thesaurus: A Writer's Guide to Character Expression*. JADD Publishing.
- Cecilia Ovesdotter Alm, Dan Roth, and Richard Sproat. 2005. *Emotions from text: Machine learning for text-based emotion prediction*. In *Proceedings of the Conference on Human Language Technology and Empirical Methods in Natural Language Processing, HLT '05*, pages 579–586, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Clifford W. Anderson and George E. McMaster. 1982. Computer assisted modeling of affective tone in written documents. *Computers and the Humanities*, 16(1):1–9.
- Clifford W. Anderson and George E. McMaster. 1986. Modeling emotional tone in stories using tension levels and categorical states. *Computers and the Humanities*, 20(1):3–9.
- Lisa Feldman Barrett. 2017. *How emotions are made: The secret life of the brain*. Houghton Mifflin Harcourt.
- Sven Buechel and Udo Hahn. 2017. *Emobank: Studying the impact of annotation perspective and representation format on dimensional emotion analysis*. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, pages 578–585, Valencia, Spain. Association for Computational Linguistics.
- João Dias and Ana Paiva. 2011. Agents with emotional intelligence for storytelling. In *Affective Computing and Intelligent Interaction*, pages 77–86, Berlin, Heidelberg. Springer Berlin Heidelberg.
- Mattia Egloff, Antonio Lieto, and Davide Picca. 2018. An ontological model for inferring psychological profiles and narrative roles of characters. In *Digital Humanities 2018: Conference Abstracts*, Mexico City, Mexico.
- Paul Ekman. 1970. Universal facial expressions of emotion. *California Mental Health Research Digest*, 8(4):151–158.
- Bjarke Felbo, Alan Mislove, Anders Søgaard, Iyad Rahwan, and Sune Lehmann. 2017. *Using millions of emoji occurrences to learn any-domain representations for detecting sentiment, emotion and sarcasm*. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1615–1625, Copenhagen, Denmark. Association for Computational Linguistics.
- Lin Gui, Jiannan Hu, Yulan He, Ruifeng Xu, Qin Lu, and Jiachen Du. 2017. *A question answering approach for emotion cause extraction*. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1593–1602, Copenhagen, Denmark. Association for Computational Linguistics.
- Eddie Harmon Jones and Cindy Harmon-Jones. 2016. Anger. In Michael Lewis, Jeannette M. Haviland-Jones, and Lisa Feldman Barrett, editors, *Handbook of Emotions*, chapter 44, pages 774–792. Guilford Publications, New York.
- Ulrike Edith Gerda Henny-Krahmer. 2018. Exploration of sentiments and genre in spanish american novels. In *Digital Humanities 2018: Conference Abstracts*, Mexico, Mexico.
- Ryan Heuser, Franco Moretti, and Erik Steiner. 2016. The Emotions of London. Technical report, Stanford University. Pamphlets of the Stanford Literary Lab.
- Patrick Colm Hogan. 2015. *What Literature Teaches Us about Emotion*, pages 273–290. Oxford University Press, USA.
- Ricardo Imbert and Angélica de Antonio. 2005. An emotional architecture for virtual characters. In *Virtual Storytelling. Using Virtual Reality Technologies for Storytelling*, pages 63–72, Berlin, Heidelberg. Springer Berlin Heidelberg.

- Randy Ingermanson and Peter Economy. 2009. *Writing fiction for dummies*. John Wiley & Sons.
- Harshita Jhavar and Paramita Mirza. 2018. **EMOFIEL: Mapping emotions of relationships in a story**. In *Companion Proceedings of the The Web Conference 2018*, WWW '18, pages 243–246, Republic and Canton of Geneva, Switzerland. International World Wide Web Conferences Steering Committee.
- Philip N. Johnson-Laird and Keith Oatley. 2016. Emotions in Music, Literature, and Film. In Michael Lewis, Jeannette M. Haviland-Jones, and Lisa Feldman Barrett, editors, *Handbook of Emotions*, chapter 4, pages 82–97. Guilford Publications, New York.
- Evgeny Kim and Roman Klinger. 2018. **Who feels what and why? Annotation of a literature corpus with semantic roles of emotions**. In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 1345–1359, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Evgeny Kim and Roman Klinger. 2019. **Frowning Frodo, Wincing Leia, and a Seriously Great Friendship: Learning to Classify Emotional Relationships of Fictional Characters**. In *Proceedings of the Annual Conference of the North American Chapter of the Association for Computational Linguistics*, Minneapolis, USA. Association for Computational Linguistics. Accepted.
- Evgeny Kim, Sebastian Padó, and Roman Klinger. 2017. **Investigating the relationship between literary genres and emotional plot development**. In *Proceedings of the Joint SIGHUM Workshop on Computational Linguistics for Cultural Heritage, Social Sciences, Humanities and Literature*, pages 17–26, Vancouver, Canada. Association for Computational Linguistics.
- Roman Klinger, Orphée de Clercq, Saif M. Mohammad, and Alexandra Balahur. 2018. **IEST: WASSA-2018 implicit emotions shared task**. In *Proceedings of the 9th Workshop on Computational Approaches to Subjectivity, Sentiment and Social Media Analysis*, Brussels, Belgium. Association for Computational Linguistics.
- Hidetsugu Komeda, Yoshiaki Nihei, and Takashi Kusumi. 2005. Roles of reader’s feelings in understanding narratives: forefeel, empathy, and a sense of strangeness. *Shinrigaku kenkyu: The Japanese Journal of Psychology*, 75(6):479–486.
- Corina Koolen. 2018. Women’s books versus books by women. In *Digital Humanities 2018: Conference Abstracts*, Mexico City, Mexico.
- Nancy Kress. 2005. *Characters, Emotion & Viewpoint: Techniques and Exercises for Crafting Dynamic Characters and Effective Viewpoints*. Writer’s Digest Books.
- Robert McKee. 2003. **Storytelling that moves people. A conversation with screenwriting coach Robert Mckee**. *Harvard business review*, 81(6):51—5, 136.
- Jacques M. van Meel. 1995. **Representing emotions in literature and paintings: A comparative analysis**. *Poetics*, 23(1):159 – 176. Emotions and Cultural Products.
- Gonzalo Méndez, Pablo Gervás, and Carlos León. 2016. On the use of character affinities for story plot generation. In *Knowledge, Information and Creativity Support Systems*, pages 211–225, Cham. Springer International Publishing.
- Saif M. Mohammad. 2012. From once upon a time to happily ever after: Tracking emotions in mail and books. *Decision Support Systems*, 53(4):730–741.
- Saif M. Mohammad and Felipe Bravo-Marquez. 2017. **WASSA-2017 shared task on emotion intensity**. In *Proceedings of the 8th Workshop on Computational Approaches to Subjectivity, Sentiment and Social Media Analysis*, pages 34–49, Copenhagen, Denmark. Association for Computational Linguistics.
- Saif M. Mohammad, Felipe Bravo-Marquez, Mohammad Salameh, and Svetlana Kiritchenko. 2018. **SemEval-2018 task 1: Affect in tweets**. In *Proceedings of The 12th International Workshop on Semantic Evaluation*, pages 1–17, New Orleans, Louisiana. Association for Computational Linguistics.
- Yusuke Mori, Hiroaki Yamane, Yoshitaka Ushiku, and Tatsuya Harada. 2019. **How narratives move your mind: A corpus of shared-character stories for connecting emotional flow and interestingness**. *Information Processing & Management*.
- Eric T. Nalisnick and Henry S. Baird. 2013. **Extracting sentiment networks from shakespeare’s plays**. In *2013 12th International Conference on Document Analysis and Recognition*, pages 758–762.
- Nanyun Peng, Marjan Ghazvininejad, Jonathan May, and Kevin Knight. 2018. **Towards controllable story generation**. In *Proceedings of the First Workshop on Storytelling*, pages 43–49, New Orleans, Louisiana. Association for Computational Linguistics.
- Rafael Pérez y Pérez. 2007. Employing emotions to drive plot generation in a computer-based storyteller. *Cognitive Systems Research*, 8(2):89–109.
- Robert Plutchik. 2001. **The nature of emotions**. *American Scientist*, 89(4):344–350.
- Daniel Preotjiuc-Pietro, H. Andrew Schwartz, Gregory Park, Johannes Eichstaedt, Margaret Kern, Lyle Ungar, and Elisabeth Shulman. 2016. **Modelling valence and arousal in facebook posts**. In *Proceedings of the 7th Workshop on Computational Approaches to Subjectivity, Sentiment and Social Media Analysis*, pages 9–15, San Diego, California. Association for Computational Linguistics.

- Andrew J. Reagan, Lewis Mitchell, Dilan Kiley, Christopher M. Danforth, and Peter Sheridan Dodds. 2016. [The emotional arcs of stories are dominated by six basic shapes](#). *EPJ Data Science*, 5(1):31.
- James A. Russell. 1980. A circumplex model of affect. *Journal of Personality and Social Psychology*, 39:1161–1178.
- Spyridon Samothrakis and Maria Fasli. 2015. Emotional sentence annotation helps predict fiction genre. *PloS one*, 10(11):e0141922.
- Jared Suttles and Nancy Ide. 2013. Distant supervision for emotion classification with discrete binary values. In *Computational Linguistics and Intelligent Text Processing*, pages 121–136, Berlin, Heidelberg. Springer Berlin Heidelberg.
- Pradyumna Tambwekar, Murtaza Dhuliawala, Animesh Mehta, Lara J. Martin, Brent Harrison, and Mark O. Riedl. 2018. Controllable neural story generation via reinforcement learning. *arXiv preprint arXiv:1809.10736*.
- Mariët Theune, Sander Rensen, Rieks op den Akker, Dirk Heylen, and Anton Nijholt. 2004. Emotional characters for automatic plot creation. In *International Conference on Technologies for Interactive Digital Storytelling and Entertainment*, pages 95–100. Springer.
- Leigh Van Horn. 1997. The characters within us: Readers connect with characters to create meaning and understanding. *Journal of Adolescent & Adult Literacy*, 40(5):342–347.
- Bei Yu. 2008. An evaluation of text classification methods for literary study. *Literary and Linguistic Computing*, 23(3):327–343.
- Xianda Zhou and William Yang Wang. 2018. [MojiTalk: Generating emotional responses at scale](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1128–1137, Melbourne, Australia. Association for Computational Linguistics.